


REVISIONS

LTR	DESCRIPTION	DATE	BY
A	ADDED STOP RING, REVISED NOTES.	10/22/09	CAR

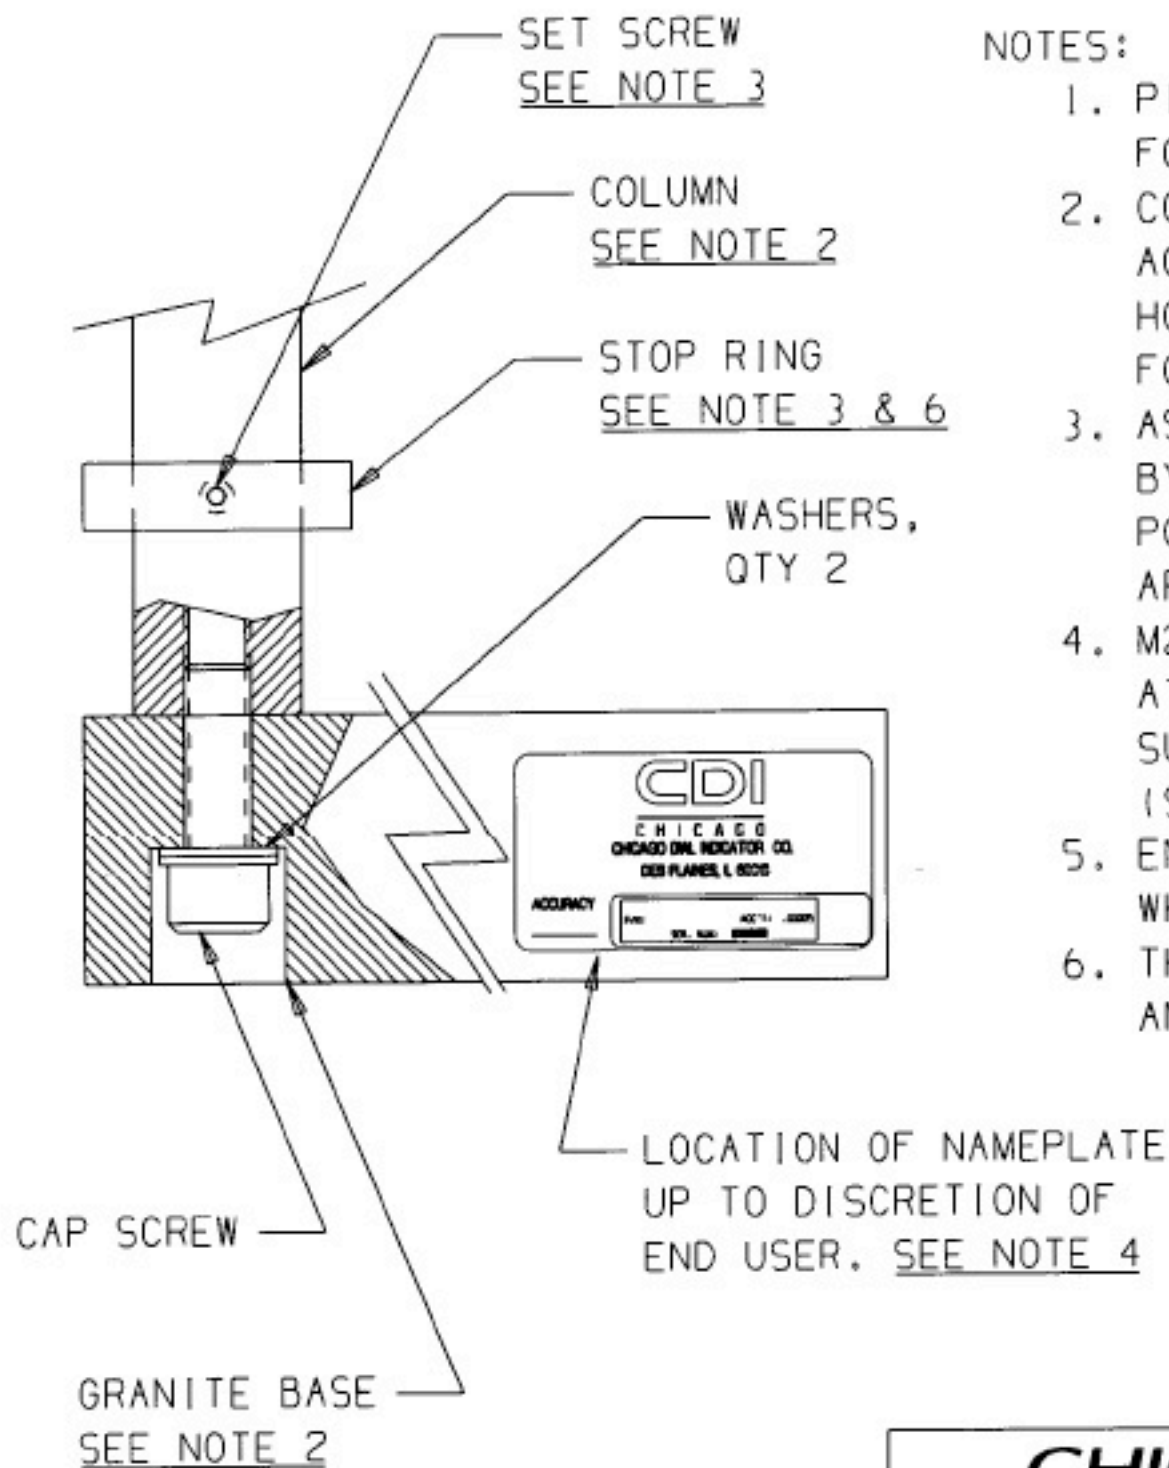

NOTES:

1. PICTORIAL REPRESENTATION OF BASE & COLUMN FOR REFERENCE ONLY.
2. COLUMN SHOULD BE TIGHT AND PERPENDICULAR AGAINST GRANITE SURFACE. CDI PART NO. H00-0013 (3/8 HEX ALLEN WRENCH) FURNISHED FOR TIGHTENING CAP SCREW. DO NOT OVER TIGHTEN.
3. ASSEMBLE STOP RING TO COLUMN, LOCK THE RING IN PLACE BY TIGHTENING SET SCREW USING A 1/8 HEX ALLEN WRENCH. POSITION OF STOP RING IS PREDICATED ON THE MOUNTING ARM AND INDICATOR USED.
4. M21-0024 NAMEPLATE W/(M21-0112) SERIAL LABEL ATTACHED SHOULD BE PLACED ON ONE OF THE VERTICAL SURFACES OF GRANITE BASE BY END USER. (SEE CALLOUT)
5. END USER SHOULD PUT DATE ON CERTIFICATE OF ACCURACY WHEN GRANITE BASE IS PUT IN USE.
6. THE STOP RING IS MEANT TO KEEP THE MOUNTING ARM AND INDICATOR FROM CRASHING INTO THE GRANITE.

CHICAGO DIAL INDICATOR CO.

1372 REDEKER ROAD, DES PLAINES, IL. 60016

TOLERANCES UNLESS OTHERWISE SPECIFIED .XXX: ±.005, .XX: ±.01, FRACTIONS: ±.015

GRANITE BASE ASSEMBLY INSTRUCTIONS

DRW BY	DATE	CHK BY	DATE	EJN NO.	CAD FILE NO.	SCALE
JNEFF	3-31-00					1/2
MATERIAL:				SIZE	DRAWING NO.	REV.
//				A	K04-0067	A